

SINCE 1978



LEADING LIGHT

Product Datasheet

vkleadinglight.gr

Jade

VK/02290/WA/GR/WW/15


Sand Green. 2700K. 8W. 513lm. AC220-240V. Type of Led Bridgelux. Lifetime 50.000hrs. Beam angle Diffuse Light. Dimmable No. Working temperature -20°C→ 45°C. Location Outdoor wall. CRI>90. ø15cm. Aluminum + Acrylic. IP65



IP65




Dimensions



Gallery




Downloads



VK Leading Light

Since 1978

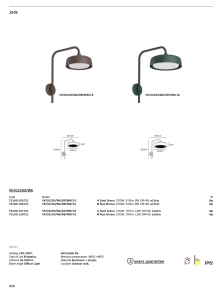


Technical Specifications

Kelvin	2700K
Power	8W
Voltage	AC220-240V
Fitting	Outdoor Wall
Type	Light
Safety class	⚡
Light source	Bridgelux
IP Rating	IP65
CRI	CRI>90
Dimmable	⊘
Lifetime	50.000hrs
Working temperature	-20°C-45°C
PAGE	324 New Products 2026
NICKNAME	Jade

Physical Specifications

Family	Jade
Color	Sand green
Material	Aluminum + acrylic
Width	ø15cm
Length	29.7cm
Height	30.6cm

Illumination Data

Lumen	513lm
Beam angle	Diffuse light
Lighting direction	


Packing Info

Pcs/carton	8pcs
------------	------

Certification & Warranty

Guarantee	3 years
-----------	---------

Energy Label

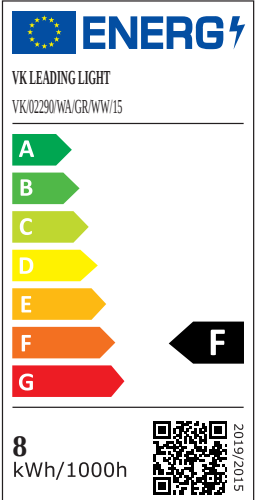

ENERGY

VK LEADING LIGHT
VK/O2290/WA/GR/WW/15

A
B
C
D
E
F
G

8 kWh/1000h

2019/2015