Kura X5

LL14703BS2

Lombardo.





Technical information:

Installation:	Ceiling recess
Material:	Technopolymer
Finish:	Black from moulding
Diffuser type:	PMMA
Optics:	18°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	95
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	12,5
Lumen:	1025
Real Lumen:	840
Power supply:	⊘ included remotely
LED:	220-240V REMOTE DRIVER INCLUDED
Circuit breaker B10 - C10 - B16 - C16	/-/-22-36
Insulation class:	⧈ CL.II
Power cable:	0,20 m PVC 2x0,25mm
Type of protection:	**IP 65**
Resistance to breakage:	**IK 06 1J xx3**
Standards and Marks of Conformity:	CE UK CA

LL codes: external driver IP20



Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Kura X5

LL14703BS2

Lombardo.





Installation images:



Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Kura X5

LL14703BS2

Lombardo.

Lighting simulation:

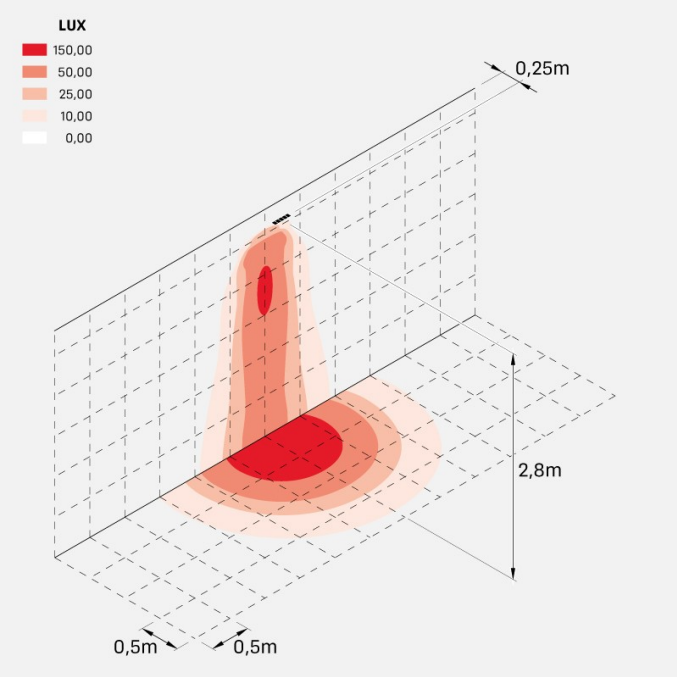

kura_x5_optic_s

Photometric curves:

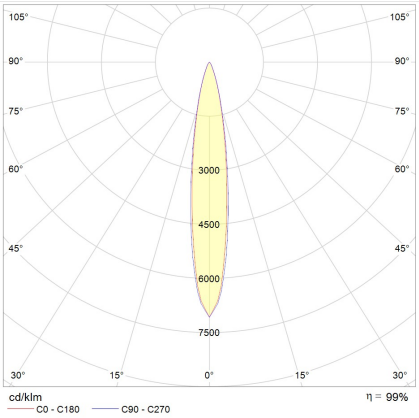

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it